



BUDGET

WATERPROOFING INC

5191 Raynor Avenue • Linthicum, MD 21090

410-609-1240 • 800-371-1199

MHIC # 41748 Lic & Insured

Email: budgeth2o@gmail.com

www.Budgetbasement.com

Customer Information

9918 Philadelphia Rd
Rosedale MD 21237

Date: 09/10/2026

Rep: Rob Bollinger Jr

Rep: 443-618-8147

Rep:

robert.bollingerjr@budgetbasement.com

Outside entrance ?

outside entrance yes

Finished or Unfinished?

Finished & Unfinished

Grade Height?

5'

Crawl Space/Basement

Basement

Concrete Floor/Dirt Floor

Concrete Floor

Existing Sump Pump

yes

Existing Pit

yes

Mira Drain

Yes


Drylok extreme / Drywall / paneling removal

Wall Type

Cement Block Wall

Drylok extreme paint 690 sq/ft

Drawing/Photos

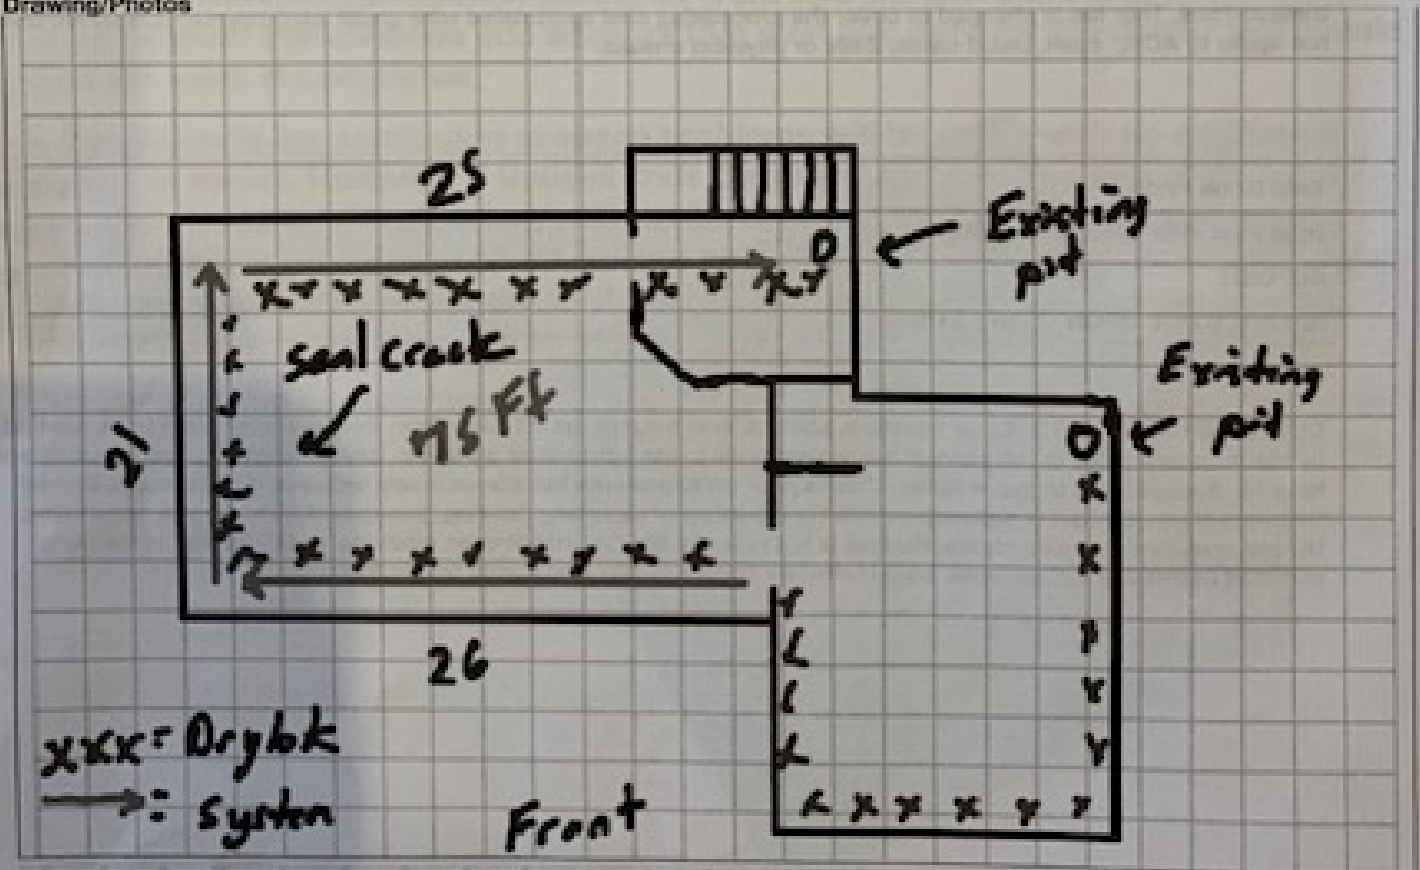

This space intentionally left blank

Drainage System - Budget will open a perimeter trench in the floor and will install 72 linear feet of our Subfloor Draitile System. This system will consist of the perimeter trench, 4" PVC perforated pipe, Felt cloth, clean stone/gravel to surround the pipe and drainboard where the floor meets the wall. If the foundation walls are cement block, weep holes will be drilled in every core of all bottom blocks. Budget will remove and haul away all job-related debris, broom sweep and recement the floor over system.

Additional Details

We will open floor along walls shown above (follow drawing and pictures) dig trench, install 4 inch perforated PVC system (area with red lines), weeping holes, drain board, #57 stone around system, tie into existing pit then recement over trench level to existing floor. Seal crack along floor with self leveling crack flex. We will also scrape walls then seal with white Drylok (area with blue x's).
Our system comes with a Lifetime Transferable Warranty.

15% off good for same-day sign up, but will extend it for a couple days.



BUDGET
WATERPROOFING INC

5191 Raynor Avenue - Linthicum, MD 21090
410-609-1240 • 800-371-1199
MHIC # 41748 Lic & Insured
Email: budgeth2o@gmail.com
www.Budgetbasement.com

Customer Information

9918 Philadelphia Rd
Rosedale MD 21237

Date: 09/24/2026
Rep: Rob Bollinger Jr
Rep: 443-618-8147
Rep:
robert.bollingerjr@budgetbasement.com

Change Order

Description of Changes

Install (1) 3/4hp Pitboss sump pump in existing pit and seal additional cracks along basement floor approximately 70 linear ft

Total Amount (Changes Only)

\$1,280